

Modular Cooking Range Line EV0700 4 Zone Electric Infrared Cooking Top Range



Short Form Specification

Item No.

Ceramic glass top cooking surface 6 mm thick, lying flush to the stainless steel frame for smooth pan movement and easier cleaning. Completely sealed infrared cooking top surface to prevent liquid infiltration. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Rightangled side edges to allow flush-fitting junction between units.

ITEM # **MODEL #** NAME # SIS # AIA

Main Features

- Ceramic glass top cooking surface with 4 infrared • heating zones 6 mm thick.
- The circular concentric heating sections measuring • 230 mm give uniform heat also to the largest pan.
- The cooking top is sealed to prevent infiltration inside • the unit.
- Warning light to indicate residual surface heat.
- Immediate heat transfer from cooking top to pan.
- Low heat dissipation to the kitchen.
- Heating via ultra high powered heating elements.
- The smooth glass-ceramic surface can be quickly and • easily cleaned, thus providing maximum hygiene.
- IPx4 water protection.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting • joints between units, eliminating gaps and possible dirt traps.

Sustainability

• Energy regulation of each zone.

Optional Accessories

- · Junction sealing kit
- Support for bridge type installation, PNC 206137 800 mm

PNC 206086

PNC 206191

PNC 206192

PNC 206240


PNC 206291

- Support for bridge type installation, PNC 206138 1000 mm Support for bridge type installation, PNC 206139
- 1200 mm
- Support for bridge type installation, PNC 206140 1400 mm
- Support for bridge type installation, PNC 206141 1600 mm Frontal handrail 800 mm PNC 206167
- Large handrail (portioning shelf) 800 PNC 206186 • mm
- Frontal handrail 1200 mm
- Frontal handrail 1600 mm
- Right and left side handrails
- Water column extension
- Chimney upstand, 800 mm PNC 206304 PNC 206320
- 2 side covering panels, height 250 mm, depth 700 mm Chimney grid net, 400mm PNC 206400

APPROVAL:





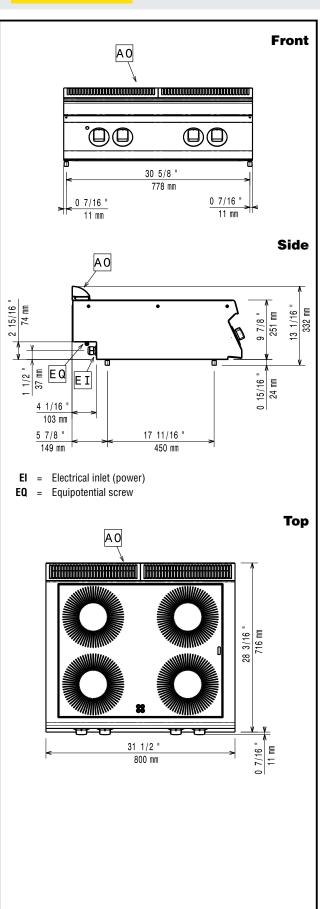

Modular Cooking Range Line EV0700 4 Zone Electric Infrared Cooking Top Range

Electric

Supply voltage: 372025 (Z7IREH4000) 372134 (Z7IREH400N) Total Watts: Predisposed for:	380-400 V/3N ph/50/60 Hz 230 V/3 ph/50/60 Hz 8.8 kW
372025 (Z7IREH4000)	380-400V 3N~ 50/60Hz 7,4-8,8kW
Key Information:	
Front Plates Power:	2.2 - 2.2 kW
Back Plates Power:	2.2 - 2.2 kW
Front Plates dimensions:	Ø 230 Ø 230
Back Plates dimensions:	Ø 230 Ø 230
Net weight:	35 kg
Shipping weight:	
372025 (Z7IREH4000)	40 kg
372134 (Z7IREH400N)	50 kg
Shipping height:	
372025 (Z7IREH4000)	520 mm
372134 (Z7IREH400N)	540 mm
Shipping width:	
372025 (Z7IREH4000)	820 mm
372134 (Z7IREH400N)	830 mm
Shipping depth:	
372025 (Z7IREH4000)	860 mm
372134 (Z7IREH400N)	850 mm
Shipping volume:	
372025 (Z7IREH4000)	0.37 m ³
372134 (Z7IREH400N)	0.38 m ³
If appliance is get up or pout to a	r against temperature consitive

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Certification group:

372025 (Z7IREH4000)	N7CIE
372134 (Z7IREH400N)	NIR78

Modular Cooking Range Line EVO700 4 Zone Electric Infrared Cooking Top Range

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.